



USER MANUAL

KULLANIM KILAVUZU

USER MANUAL

The DODO Security Kit is a DIY home security system that works on any house, office, or apartment. It comes with an RF WIFI CONVERTOR, Contact Sensor, and Motion Detector.

DODO Security system is simple enough to install without any tools or professional installation. Simply place the Contact Sensor on any door or window in your home, and you'll get a mobile notification every time it opens. You can also set the Motion Detector in any room of your home, and you'll get a notification when motion is detected. This is the perfect starter kit for condos, apartments, or small homes up to 1,000 square feet.

What's in the box!

- RF WIFI CONVERTER
- Motion Detector
- Magnetic Sensor
- Batteries.
- Power adapter
- User Manual

Installing DODOTIK App


You may find the DODOTIK app on the Apple App Store or Google Play store.

You can also scan the QR code and install it:



When you open the app, click on SIGN UP, then input phone number for getting the verification code to register an account.

The free app DODOTIK is compatible with mobile devices that support IOS 8.0 and above, and Android 4.4 and above.

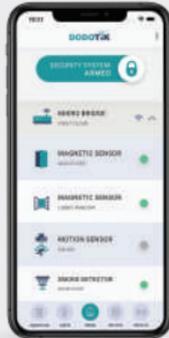

Connecting the RF WIFI Converter with the DODOTIK App

The user should follow these important steps to add the device:

- Please make sure that the device is connected with a power source, and the LED light is blinking. Then, open the DODOTIK app.
- From the menu, click on Wi-Fi settings, then enter the Wi-Fi SSID and Password of your router (support only 2.4GHZ router), and click on “Submit.”
- Make sure that your mobile phone is connected to the same Wi-Fi router.
- Click on “Add Device” from the main menu or at the “+” from the front page.
- Click on NEXT, and then you should wait a while until the app finds the device. Then, click on “Add Device.” You will be asked to enter the device name and location (all languages supported), and then click “OK.” After that, your device will be added to the security page.

Connecting the Sensors to the DODO Security System



How to connect the Sensors to the RF WIFI Converter:

You can add both sensors and connect them with RF WIFI CONVERTER by clicking on the “Add Sensor” button on the security page. Then, scan the Sensor QR code that will be found on the back of the sensor device.


You will be asked to enter the sensor name (all languages supported) and sensor location. Then click “OK.” Repeat the same steps with other sensors.

Sensors Installation:

You should insert batteries inside both sensors before installing them while observing the polarity.

1. Install Magnetic Sensor:

The magnetic sensor is a detector used to detect illegal door prying and window entry.

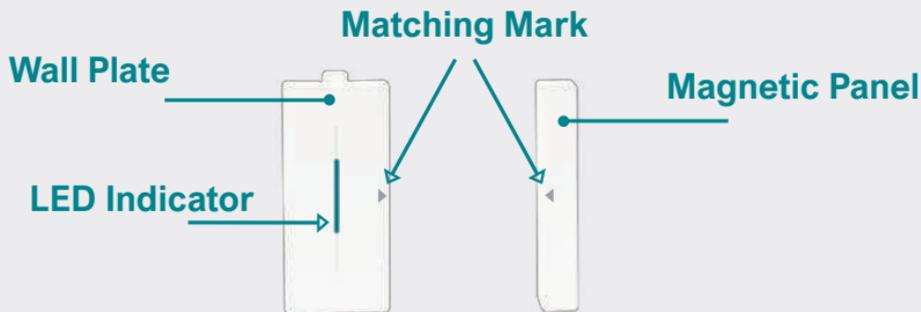

It consists of two parts: transmitter (main panel) and magnetic panel, when the transmitter and magnetic panel are separated to a certain distance, the transmitter sends out an alarm.

Fix the magnetic on the door or window by using 3M adhesive tape and fix the transmitter on the other side then test it. When you open the door or window, the led indicator will turn on for 3 seconds.


Attention please, transmitter mark " ▶ " and magnetic mark " ◀ " in same height level, the distance between them should be less than 1.5 cm The picture below explains how to install it using 3M adhesive tape (include in the kit).



2. Install Motion Detector

The controlled area and the efficiency of the security system depends on the location of the detector. Location of Motion Protect depends on the remoteness from the RF WIFI Converter and the presence of any obstacles between the devices hindering the radio signal transmission: walls, inserted floors, large-size objects located within the room. Make sure that any furniture, domestic plants, vases, decorative, or glass structures do not block the field of view of the detector. We recommend installing the detector at a height of 2,4 meters.

If the detector is not installed at the recommended height, this will reduce the area of the motion detection zone and impair the operation of the function of ignoring animals. The detection distance of the sensor is 12 meters, and the angle of the sensor eye is 110 degrees. You can install the sensor in any room inside the home.

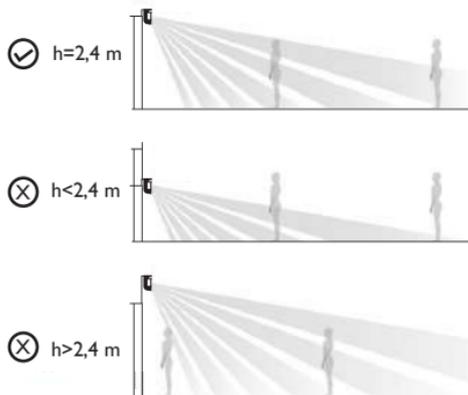

Safety Information

The device is recommended for use indoors and in a dry location only. Please contact the seller for a replacement if there is any damage caused by transportation. Please do not disassemble or uninstall the device; otherwise, product damage or security risks may be caused.

Warranty

A limited warranty covers the RF WIFI Converter from the seller for the original purchaser, which includes the product defects from workmanship and materials for two years from the date of purchase (damage through normal wear and tear, alteration, misuse, neglect, accident, service by anyone other than the authorized service center, or act of God is not included).

During the warranty period and upon verification of defects, this product will be replaced when returned with proper proof of purchase.